

## Product Data

Roll size:  
3.25' x 100' (325 sq ft)

Thickness:  
Extenduct: 0.45"  
Extenduct 2: 0.46"

Weight:  
Extenduct: 0.142 lb/sq ft  
Extenduct 2: 0.165 lb/sq ft


Compressize Load:  
>30,000 psf  
(ASTM D-1621)

Flow Rate:  
Extenduct:  
20.7 gal/min/ sq ft

Extenduct 2:  
17.9 gal/min/sq ft

(ASTM D-4716 at 1000psf  
and 1.0 gradient)

Made in USA

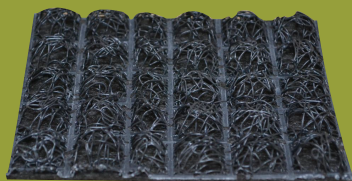

# Extenduct

- Options include both protection fabric and/or filter fabric fully integrated into drainage core
- Excellent durability
- Includes protection for waterproofing
- Conforms to irregular surfaces and corners
- Waffle design creates open flow path, even during backfill
- Long rolls reduce installation costs by reducing butt seams and eliminating interlocking
- Recycled content polymer contributes towards LEED points
- 3" fabric overlap

	Units	Filter Fabric	Protection Fabric	Test Method
Polymer	-	Polypropylene	PA6 & PET	-
Fabric Color	-	Black	Grey	-
Weight	lbs/ft <sup>2</sup>	0.31	0.25	ASTM D-5261
Grab Strength MD/CD	lbs	120.0	125.0	ASTM D-4632
Grab Elongation	%	50	40	ASTM D-4632
Trapezoidal Tear	lbs	50.0	40.0	ASTM D-4533
Puncture Strength	lbs	70.0	35.0	ASTM D-4833
AOS (maximum average)	mm	0.212	0.357	ASTM D-4751
Flow Rate	gal/min/ft <sup>2</sup>	120.0	185.0	ASTM D-4491
Permittivity	sec <sup>-1</sup>	1.8	2.5	ASTM D-4491